



CONDUCTIVE ITO WINDOW FILM

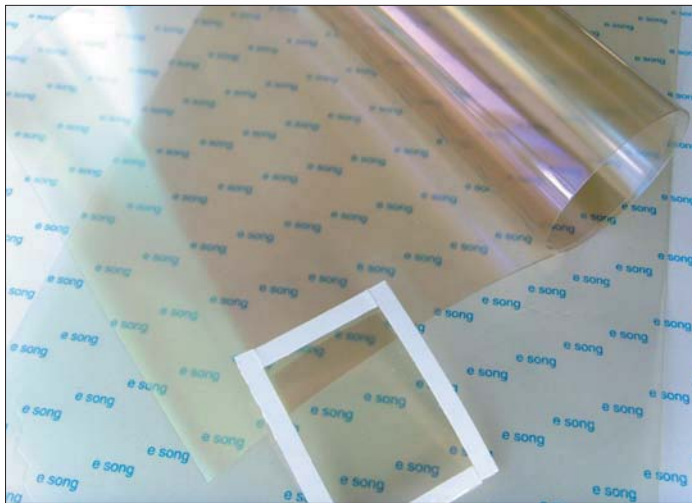

- Highly transparent
- Easy use - hand-cut or die-cut

- Apply on an existing pane using conductive PSA on the edges. Leaves no messy glue on LCD, or air bubbles to obstruct view.
- It comes 1,000mm wide and 100m long, so that the film can cover most large panes.
- Ideal for building windows (hospitals, homes near high voltage electric lines, etc.)


PART NUMBER STRUCTURE

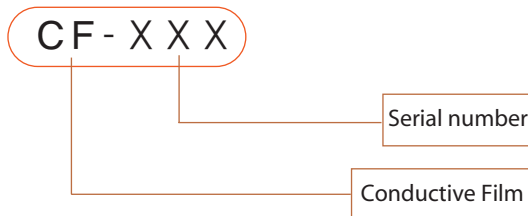

SPECIFICATIONS

Property	Value	Test Method
Film Thickness [mm]	0.125	-
Surface Resistance [Ω / \square]	80 ± 20	* ESQ-517-04
Shielding Effectiveness [dB] (20MHz-1GHz)	> 13	ASTM D 4935
Transparency (550nm) [%]		
Thermal resistance(80k, 250hrs)	OK	KS C 2102
Double side conductive tape	surface resistance 0.08 Ω / \square	* ESQ-517-04
	Adhesive power 1000g/inch	ASTM D 3330
Standard roll size	1000mm x 100m	-

HOW TO GROUND

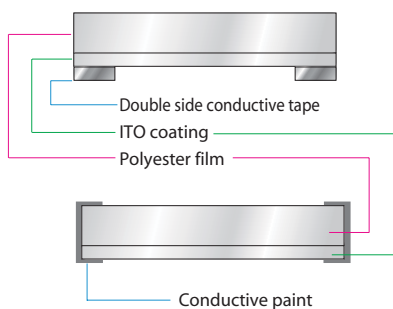

USAGE EXAMPLES

